

DATASHEET

COOLSHADE/POLYCARBONATE FILM

PRODUCT SPECIFICATION

RANGE: SAFETY FILM

VARIANT: N/A

SHADING COEFFICIENT: **0.33**

'U' FACTOR: **N/A**

EMISSIVITY: **N/A**

FILM COLOUR: **GREY**



FEATURES & BENEFITS

A diffused light grey tint when viewed from below.


Water and alcohol resistant, very cohesive and extremely durable.

Coolshade is a solar control film. Its metallized surface gives a dramatic reduction of the incoming solar heat by continuously reflecting it away, up to 10 degrees difference in room temperature have been achieved.

Applications can be applied internally and externally to most polycarbonate and GRP substrates.

This product carries a full 8 year manufacturer's warranty when professionally installed and 2 years when applied externally.

% MAY CHANGE SLIGHTLY
DEPENDING ON GLASS TYPE

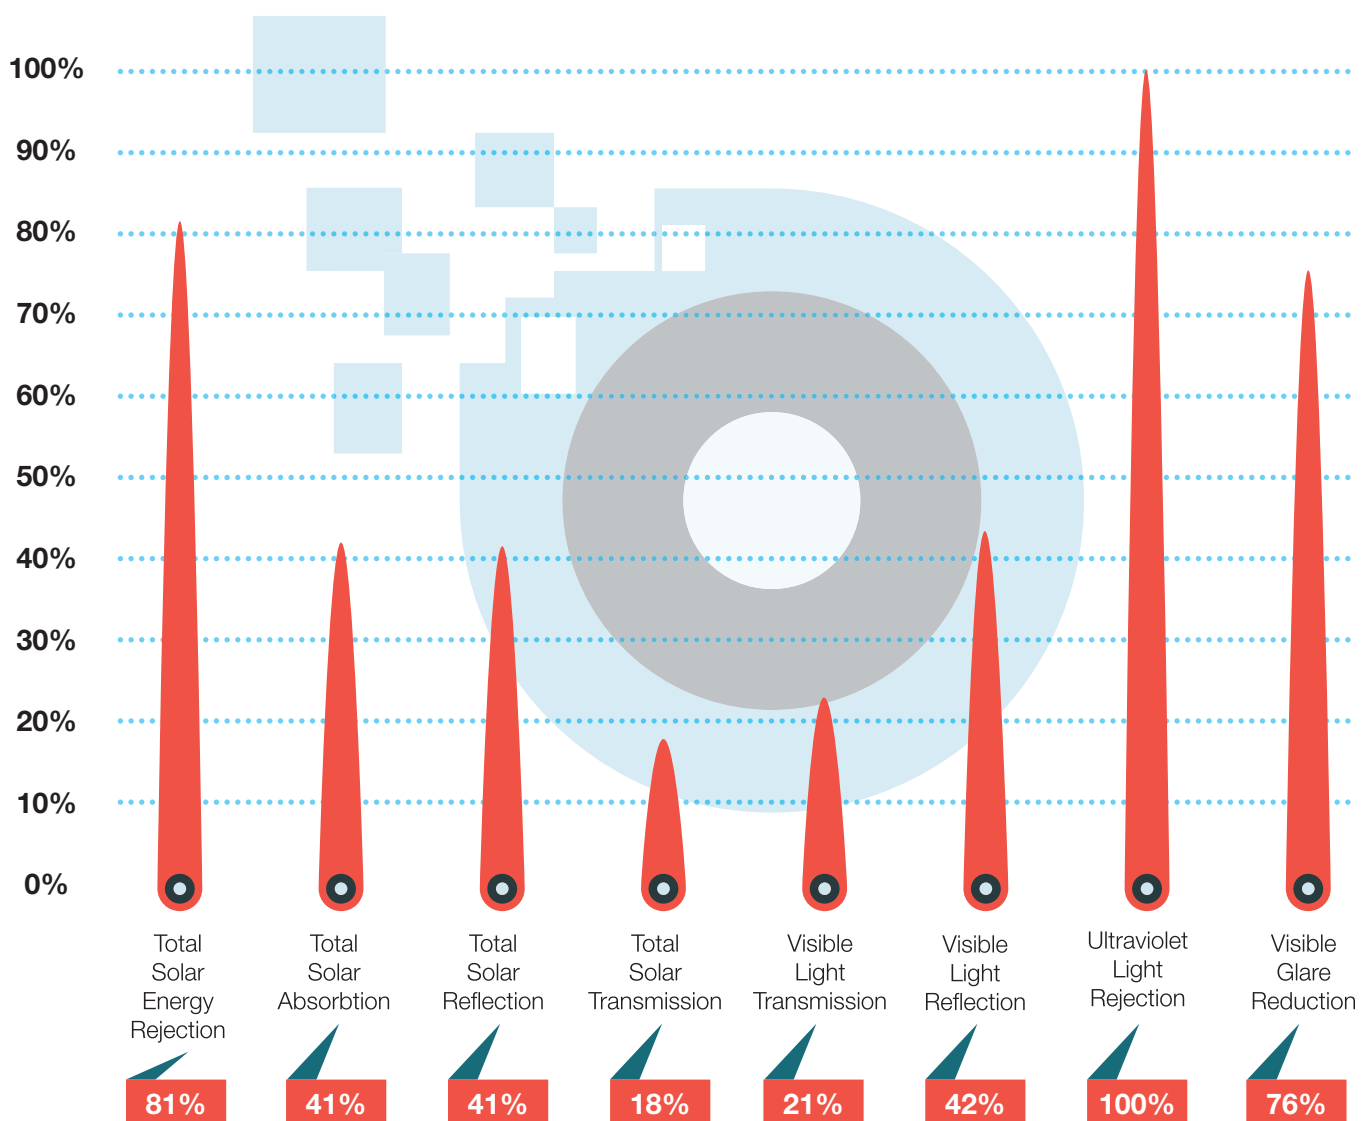

WWW.SOLARTEKFILMS.COM

INFO@SOLARTEKFILMS.COM

CALL NOW: 08000 15 18 15

SOLARTEK FILMS LTD, M25 BUSINESS CENTRE,
121 BROOKER ROAD, WALTHAM ABBEY, ESSEX, EN9 1JH